



W8000355



TITLE:

INSTALLATION OF ENGINE OIL COOLER LINE KIT
W8000322 OR W8000325.

SECURITY CLASSIFICATION:

UNRESTRICTED, REFERENCE ONLY

SYNOPSIS:

INSTALLATION INSTRUCTION EOC LINE KITS

KEY WORDS:

INSTALLATION INSTRUCTION EOC LINE KITS
ENGINE OIL COOLER W8000322 W8000325 6.5L
DIESEL ENGINE

PREPARED BY:

STEPHEN WHITE

DATE OF ISSUE:

07MAR05



**INSTALLATION OF
ENGINE OIL COOLER LINE KITS
W8000322 OR W8000325**

FOR REFERENCE ONLY

INSTRUCTION NO W8000355

1 *Intended Usage*

This instruction shows how to install the following kits

KIT	USAGE
W8000322	Kit GM 94-97 (units with Auxiliary cooler)
W8000325	Kit GM 98-99 / Workhorse 99-2001 (units with Auxiliary cooler)

These kits are for replacement of engine oil cooler lines (EOC's) on the 6,5L diesel engine application.

2. *Kit Content*

KIT	PART	DESCRIPTION	QTY
W8000322	HOSE KIT, ENG OIL COOLER, INLET & OUTLET (1994-1997, W/ AUX COOLER)		1
	W0002782	CLAMP, DUAL TIE 1/4" MOUNTING HOLE	3
	W8000326	HOSE ASM, ENG OIL COOLER	1
	W8000327	HOSE ASM, ENG OIL AUXILLIARY COOLER	1
	W8000328	HOSE ASM, ENG OIL COOLER OUTLET	1
	W8000329	O-RING	6
	W8000330	FITTING, ENG OIL COOLER HOSE	2
	W8000355	INSTRUCTION, FITMENT (KITS W8000322, W8000325)	1
W8000325	HOSE KIT, ENG OIL COOLER, INLET & OUTLET (1998-2001, W/ AUX COOLER)		1
	W0002782	CLAMP, DUAL TIE 1/4" MOUNTING HOLE	3
	W8000336	HOSE ASM, ENG OIL COOLER INLET	1
	W8000337	O-RING (GREEN) (6 PIECE KIT)	1
	W8000338	HOSE ASM, AUXILLIARY ENG OIL COOLER INLET	1
	W8000339	HOSE ASM, ENG OIL COOLER OUTLET	1
	W8000341	FITTING, ENG OIL COOLER HOSE	6
	W8000355	INSTRUCTION, FITMENT (KITS W8000322, W8000325)	1
	W8005005	FITTING – 5/8" QUICK CONNECT MALE TO 7/8" – 18UNF FEMALE	2

3. *Important Notes*

- 3.1 The ideal time for fitment of these kits is at a scheduled engine oil change.
- 3.2 Failure to observe the methods and precautions in this document may result in damage to other components of the unit being repaired.
- 3.3 Ensure that all required parts are present before removing the old oil cooler lines.
- 3.4 Procure the required wire ties locally (figure 10).
- 3.5 **READ CAREFULLY: Removal of “Quick-Connect” fittings**

The OEM fitted quick-connect (QC) fittings are coated with Loctite 567 medium strength thread sealing compound before being screwed into the auxiliary oil cooler at 18 to 23Nm. Depending on the age of the vehicle, this compound will have hardened substantially, making the bond between the QC fittings and the threads in the auxiliary cooler and radiator cooler extremely tight (Figure 3).

Removal of these QC connectors requires extreme care.

Removal of the QC connectors attached to the main oil cooler (this main cooler is located in the radiator Asm) is not advised nor required.

An attempt to remove these connectors may result in damage to the radiator and such damage is not warranted by Workhorse or Uptime Parts.

If the vehicle in repair is not under a warranty and the dealer elects to remove the QC's from the main oil cooler at own risk, the adapters that will be required to fit the EOC lines to the main cooler (2 X W8000341) are included in this kit.

4. Installation

4.1 Soak all threaded fittings with high quality penetrating oil.

4.2 Cut the existing cooler lines at the auxiliary cooler with a bolt/tubing cutter close to the “quick-connect” fittings (figures 1 and 2).

Do not attempt to use the quick disconnects as they may be corroded and doing so may cause damage to the auxiliary cooler (figure 3).

4.3 Let the oil drain into an appropriate container (figure 2).

Figure 1


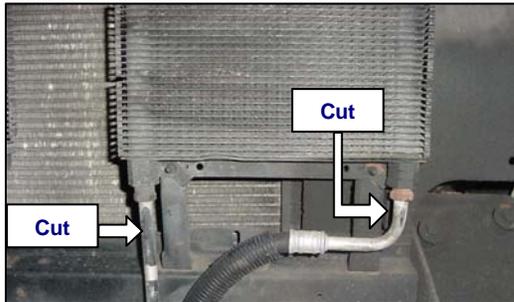


Figure 2

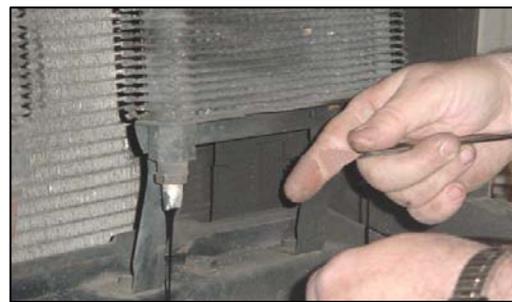

4.4 Remove “Quick-Connect” Adapter fittings from the Auxiliary Cooler (Figure 3).


These QC adapters will be tightly locked in place. An attempt to force the connection open with torque gradually applied using a hand wrench is likely to tear the auxiliary cooler.

For the auxiliary cooler it is important to use an impact wrench to remove the QC connectors and to use that wrench with extreme care, in short, controlled bursts.

The effect of the impact wrench is a breaking of the crystalline structure of the aged LocTite 567. This, greatly reduces the torque required to unscrew the fittings.

The impact wrench must be used with care, applying impact in short bursts until the connection is loose. Failure to observe this may result in shearing the QC fitting or damaging the auxiliary cooler.

Figure 3

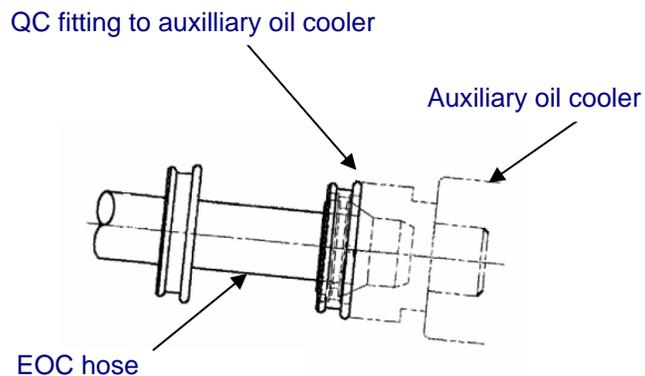


- 4.5 Coat the male end threads of the new brass fittings (supplied in the kit) with a Teflon thread sealer. **Be sure the sealant is used on threads only. Excessive application could result in sealer entering into the engine oil system, potentially causing damage (Figure 4).**

Figure 4




- 4.6 Screw the new brass fittings into the auxiliary cooler. Tighten the fittings to 42 lb ft (57Nm).
- 4.7 Remove the retaining clips from the QC fittings at the radiator (primary) cooler and unplug the old EOC lines from the radiator asm. Retain these clips.
- 4.8 Let the oil drain.
- 4.9 The assembly of the main cooler into the radiator assembly unit is not suited to the removal of the QC fittings because of the soft material of the side tanks.

Figure 5

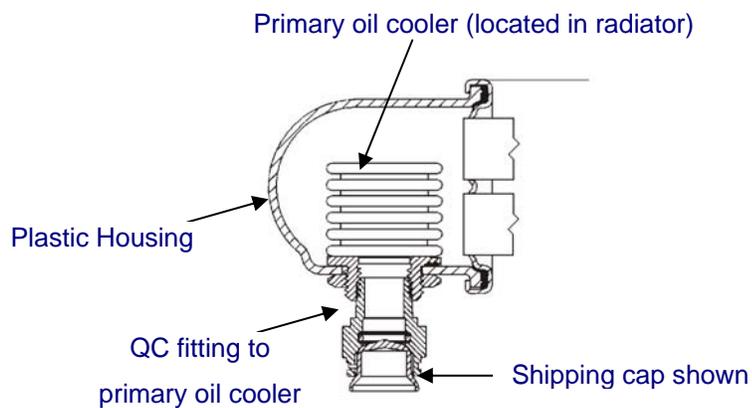

- 4.10 Fit one W8005005 adapter into each radiator EOC QC and re-insert the retained retainer clips (Figure 6)
Ensure that these clips are properly fitted as engine oil loss and subsequent engine damage may ensue if the connection is not established or the retainer is not correctly fitted.


Figure 6

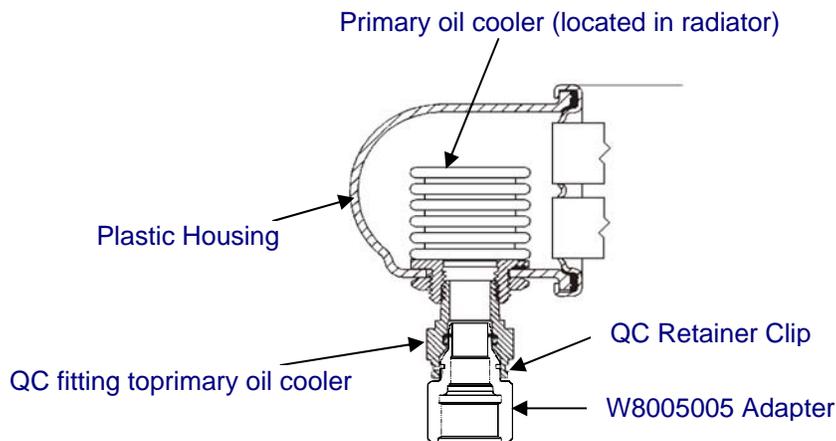

- 4.11 *If the dealer attempts to remove the QC connectors this will be at his own risk. If such removal is attempted and is successful, use 2 X W8000341 fittings to fit the new EOC lines.*

- 4.12 Cut the cooler lines at the engine block (left/drivers side), at the engine block cooler housing. Let the oil drain (figure 7).

Figure 7

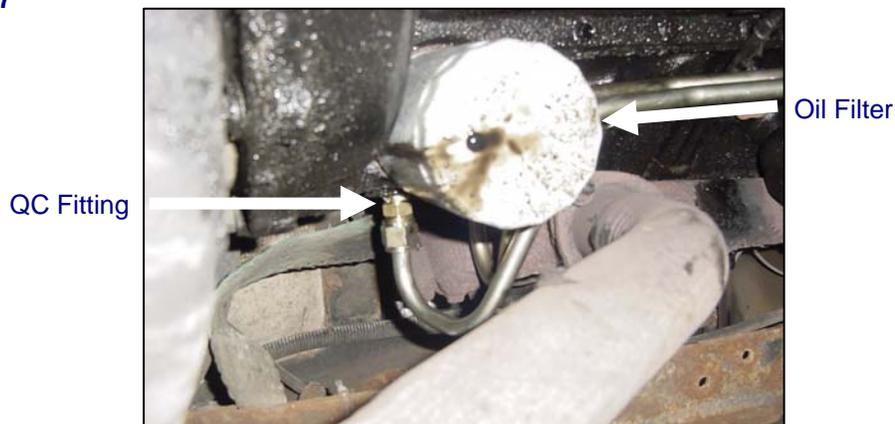


- 4.13 Remove the oil filter if the oil is to be changed.

- 4.14 Loosen the cooler line fittings at the engine block with a 1 ¼" Socket (retaining rings must be removed first). Position the socket drive wrench in between the transmission case and the exhaust pipe. **Engine block fittings may be very tight and require additional coats of penetrating oil. Use extra care not to snap the fittings off in the engine block.**

- 4.15 Starting at the radiator core support, cut the plastic retaining straps with side cutters. Lower the hoses, allowing them to drain.
- 4.16 Lower and remove cooler lines, exiting them from the rear of the vehicle.
- 4.17 Install the new male fittings into the engine block (front and rear), sealing the threads with Teflon sealer. Tighten the forward most fitting first to 42 ft lb (57 Nm).
- 4.18 Install both inlet and outlet cooler hoses, starting at the rear of the vehicle. **Tape the ends of the cooler lines before installing them, in order to keep dirt/debris from entering the lines.** Feed the hoses from the rear to the front of the vehicle.
- 4.19 Install the engine block (front fitting on block) cooler line to the right (passenger) side fitting on the auxiliary oil cooler. **Be sure to seat the included O-rings fully. Do not tighten the hose fittings at this time.** Route the cooler line between the exhaust Y pipe and engine block, going over the engine crossmember to the auxiliary oil cooler. **Be sure to leave adequate clearance between the engine oil filter and the cooler lines.**
- 4.20 Install the engine block (rear fitting on block) cooler line to the lower radiator (tank) fitting, which is located on the drivers/left side. **Be sure to seat the included O-rings fully. Do not tighten the hose fittings at this time.** Route the cooler line through the exhaust Y pipe, over the engine crossmember to the lower radiator (primary cooler) fitting (Figure 8). Attach both cooler lines to the bracket located on the engine cross member.

Figure 8

The power steering pump drive pulley is in this area. Route the hoses so that they are secure and clear of this pulley.

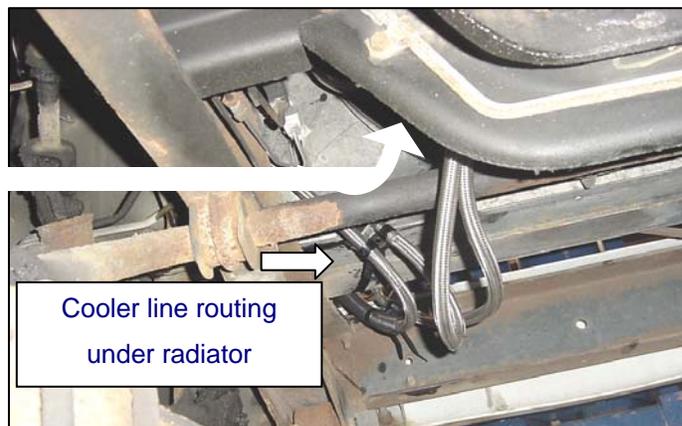

- 4.21 Install/thread the new male ended fittings into the left/drivers side of the radiator coolant tank. Seal the threads with Teflon sealer and torque the fittings to 42 lb ft (57 Nm).
- 4.22 Install the final (third) cooler hose (cooler to cooler) from the upper radiator (cooler) tank fitting, to the drivers (left) side of the auxiliary oil cooler.
- 4.23 Leaving the line fittings loose, begin to install wire ties/brackets on the cooler lines, starting at the front of the lines by the auxiliary oil cooler (Figures 9 to 11).
Ensure that the convoluted plastic protection sleeve on the drivers side line is located so that it will protect that line from any damage which may otherwise occur if it were to rub or bump against the chassis or against the power steering pump drive pulley (Figure 8).

Figure 9

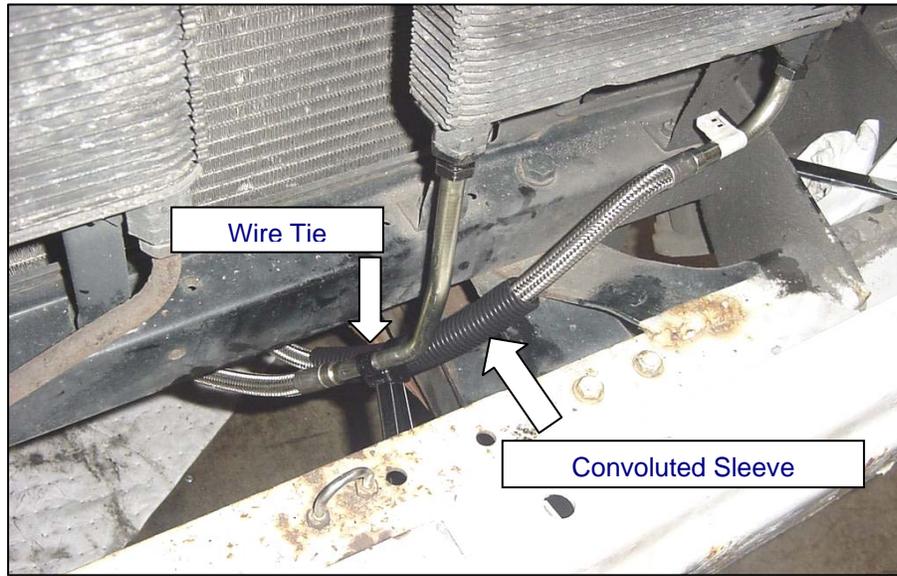


Figure 10


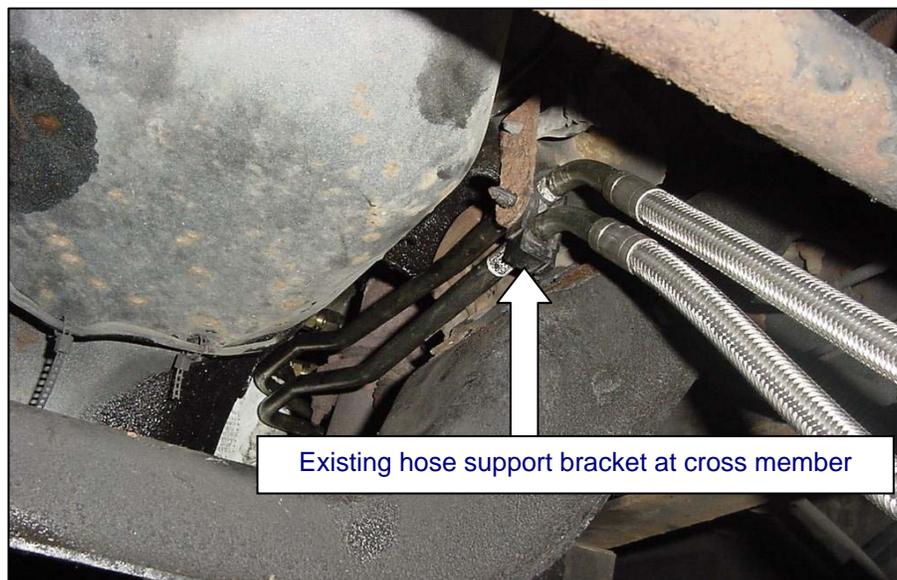



Figure 11

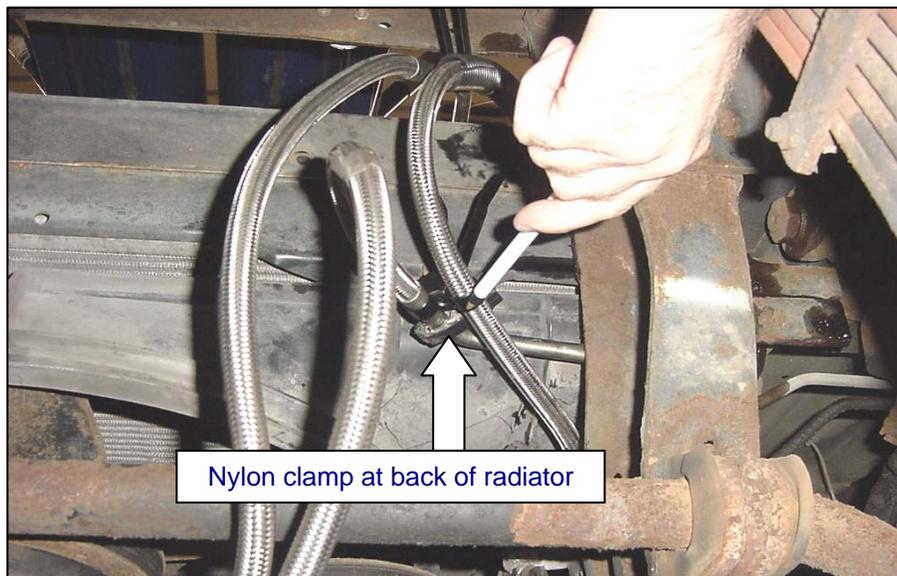

4.24 Three large black wire ties are to be used (Figure 12). One is used in the front, where the lines come into a Y, a second is used 16" back from that point, and a third is used at the frame rail in the front.

4.25 **Make sure the upper cooler hose is level with the frame rail behind the radiator.** The upper hose goes through the plastic loop hold down on top of the horizontal (front) frame rail next to the ABS Module.

Figure 12

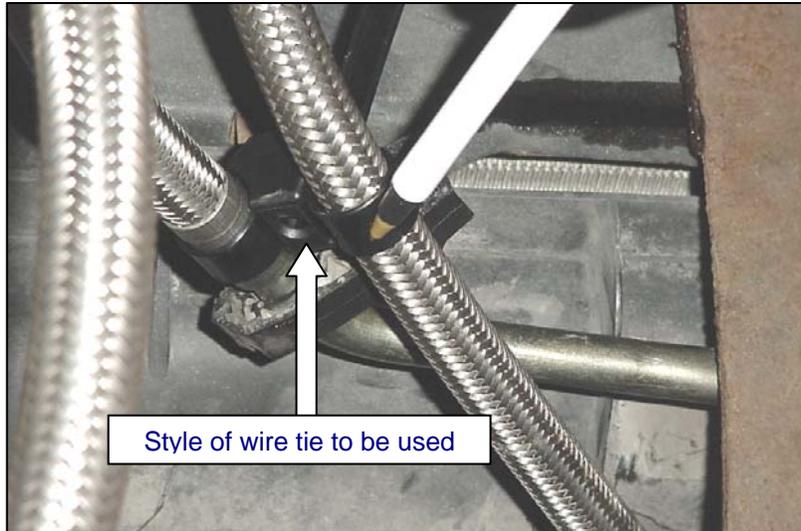

4.26 Tighten all of the line fittings (engine, radiator cooler tank and auxiliary cooler) to 42 lb ft (57 Nm).

4.27 Drain the remaining engine oil through a filter and ensure that all contamination/debris has been removed from the crankcase.

4.28 Install a new oil filter if an oil change interval is being recorded.

4.29 Refill with Appropriate fluids, run the vehicle and check for leaks.

END OF INSTRUCTION